

IEP-D

2+2+2 movement
INCH SERRATION

IEP-C

2+2+2 movement
TONGUE & GROOVE

High precision 6-jaw chuck 2+2+2 equalising Ø 400 - 800 mm

- Closed center
- Equalising mechanism lockable
- Centrifugal force compensation

Application/customer benefits

- Clamping of thin walled workpieces
- Low radial deformation with 2+2+2 clamping
- Suitable for horizontal and vertical machines

IEP-D: Master jaws with INCH SERRATION

(3/32" x 90° sizes 500-630-800, 1/16" x 90° size 400)

IEP-C: Master jaws with TONGUE & GROOVE

Technical features

- Adjustable to 6 jaw 2+2+2 or true 6 jaw clamping
- Possibility to regulate the equalising stroke from full (for OP10) to very small (for OP20)
- Constant gripping force with permanent lubrication
- Centrifugal force compensation for high spindle speed
- **proofline® chucks** = fully sealed - low maintenance

Standard equipment

Chuck with mounting bolts

1 set of soft top jaws


1 equalising stroke regulating key

Ordering example

Chuck IEP-D 500 / Z380



Actual gripping force diagram

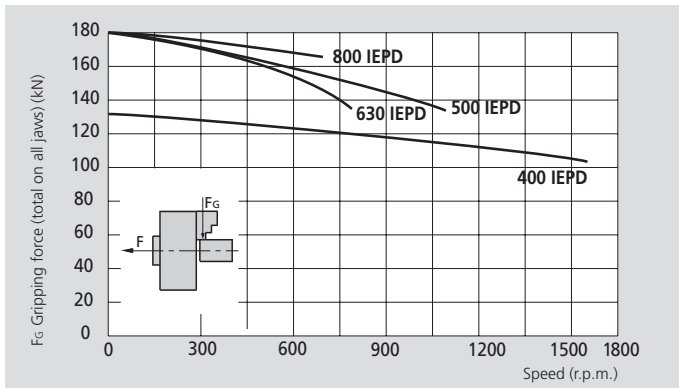

The data in the diagram refers to 6-jaw chucks, newly maintained according to their service manuals using the original lubricant. The static and dynamic gripping forces have been measured using standard soft top jaws, placed in a position not exceeding the outer diameter of the chuck.

⚠ Safety advice / danger of damage:

When using taller / heavier jaws and / or clamping on a bigger diameter reduce draw pull/rotating speed accordingly.

Technical data

SMW-AUTOBLOK Type		IEP-D 400	IEP-C 400	IEP-D 500	IEP-C 500	IEP-D 630	IEP-C 630	IEP-D 800	IEP-C 800
Number of jaws		2+2+2		2+2+2		2+2+2		2+2+2	
Radial jaw stroke	mm	10		15		15		15	
Jaw compensation	mm	±2.5		±4		±4		±4	
Axial piston stroke	mm	20		30		30		30	
Max. draw pull**	kN	90		120		120		120	
Max. gripping force**	kN	130		180		180		180	
Max. speed	r.p.m.	1600		1100		800		650	
Weight (without top jaws)	kg	145		260		410		670	
Moment of inertia	kg·m²	2.9		8.5		20		55	
Hard top jaw (set of 3*) for IEP-D	Id. No.	12083036		12084546		12084546		12084546	
Soft top jaw (piece) for IEP-D	Id. No.	12073000		12074040		12075050		12075050	
Soft top jaw (piece) for IEP-C	Id. No.	12043060		12044050		12045050		12045050	
Recommended actuating cylinders	Type	SIN-S 100 / 125 / 150		SIN-S 150 / 175 / 200		SIN-S 150 / 175 / 200		SIN-S 150 / 175 / 200	
Id. No. IEP-D		77994220		77995030		77996332		77998030	
Id. No. IEP-C		77994221		77995020		77996331		77998029	

* 2 sets (= 6 pieces) per chuck are required.

**For internal clamping reduce the draw pull by 30%.



SMW-AUTOBLOK
327

High precision 6-jaw chuck 2+2+2 equalising

Ø 400 - 800 mm



- Closed center
- Equalising mechanism lockable
- Centrifugal force compensation

IEP-D

2+2+2 movement
INCH SERRATION

IEP-C

2+2+2 movement
TONGUE & GROOVE

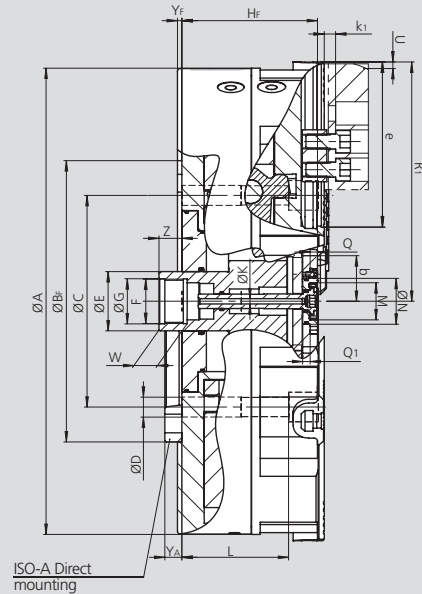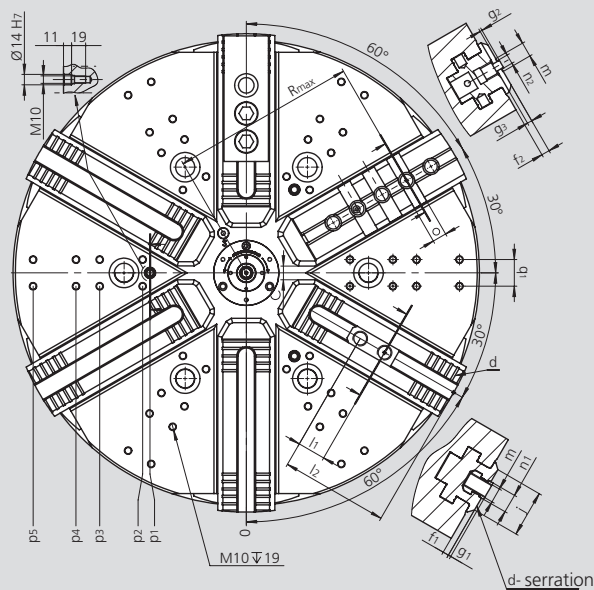

Subject to technical changes.

For more detailed information please ask our customer service.

SMW-AUTOBLOK Type			IEP-D 400	IEP-C 400	IEP-D 500	IEP-C 500	IEP-D 630	IEP-C 630	IEP-D 800	IEP-C 800
	A	mm	419	419	510	510	630	630	800	800
	BF H6	mm	300	300	380	380	380	380	520	520
	C	mm	235	235	330.2	330.2	330.2	330.2	463.6	463.6
	D	mm	21	21	25.5	25.5	25.5	25.5	25.5	25.5
	E	mm	75	75	80	80	80	80	80	80
	F	mm	M60 x 1.5	M60 x 1.5	M60 x 1.5	M60 x 1.5	M60 x 1.5	M60 x 1.5	M60 x 1.5	M60 x 1.5
	G H8	mm	61	61	61	61	61	61	61	61
	HF	mm	154	154	184	184	184	184	184	184
Through-hole	K	mm	7	7	7	7	7	7	7	7
	L	mm	130	130	144	144	144	144	144	144
	M	mm	M50 x 1.5	M50 x 1.5	M50 x 1.5	M50 x 1.5	M50 x 1.5	M50 x 1.5	M50 x 1.5	M50 x 1.5
	N H8	mm	62	62	62	62	62	62	62	62
	Q	mm	10	10	10	10	10	10	10	10
	Q1	mm	10	10	10	10	10	10	10	10
Chuck open	R1	mm	212	212	263.5	263.5	323.5	323.5	408.5	408.5
Jaw stroke	U	mm	10	10	15	15	15	15	15	15
	W	mm	38	38	38	38	38	38	38	38
Max. / min.	Z	mm	16 / -4	16 / -4	61 / 31	61 / 31	61 / 31	61 / 31	61 / 31	61 / 31
Min.	b	mm	45	45	46.5	46.5	46.5	46.5	46.5	46.5
Min.	c	mm	2.9	2.9	3.5	3.5	3.5	3.5	3.5	3.5
	d	inch	1/16" x 90°	-	3/32" x 90°	-	3/32" x 90°	-	3/32" x 90°	-
	e	mm	150	150	174	174	234	234	319	319
	f1	mm	8	-	8	-	8	-	8	-
	f2	mm	-	8	-	11	-	11	-	11
	g1	mm	3.5	-	3.5	-	3.5	-	3.5	-
	g2	mm	-	3	-	3	-	3	-	3
	g3	mm	-	3.5	-	6.5	-	6.5	-	6.5
	j	mm	58	58	63	63	63	63	63	63
	k1	mm	9	9	15.5	15.5	15.5	15.5	15.5	15.5
	l1	mm	30	38.1	38	38.1	38	38.1	38	38.1
Max. / min.	l2	mm	108 / 43	-	138 / 54	-	198 / 54	-	283 / 54	-
	m	mm	M16	M16	M20	M20	M20	M20	M20	M20
	n1 h8	mm	21	-	25.5	-	25.5	-	25.5	-
	n2	mm	-	12.7	-	12.7	-	12.7	-	12.7
	o	mm	-	19.03	-	19.03	-	19.03	-	19.03
Radial position	p1	mm	150	150	130	130	130	130	130	130
Radial position	p2	mm	140	140	140	140	140	140	165	165
Radial position	p3	mm	195	195	-	-	198	198	200	200
Radial position	p4	mm	-	-	230	230	230	230	255	255
Radial position	p5	mm	-	-	-	-	288	288	290	290
	q1	mm	36	36	36	36	36	36	36	36
	Rmax	mm	-	139	-	198	-	250	-	351
	YF/YA	mm	6 23	6 23	6 23	6 23	6 23	6 23	6 23	6 23
Number of cross grooves (IEP-C)			-	1	-	2	-	3	-	6