

- Hydraulic clamping and indexing
- 2 jaws
- Divisions: 4 x 90° / 8 x 45° / 3 x 120° / 6 x 60° or specials



### Application/customer benefits

- Fully automated and high productivity machining of components with orthogonal axis or with 45°, 60° or 120° axis
- High productivity for machining of workpieces like valve bodies, spiders or fittings (see picture below) at high position accuracy

**AXN:** Automatic indexing chuck with hydraulic clamping and indexing

### Technical features

- Rigid holding of the workpiece at high revolutions allowing high chip removal rates
- High positioning and repeatability precision
- Reliable indexing system with constant oil lubricated internal mechanism
- Constant and automatic in-process controls for extremely safe machining
- **proofline® chucks** = fully sealed - low maintenance

### Components supplied on request


Adapter parts and clamping jaws

### Unique features

- Hardened and ground body and internal parts designed to avoid deformation, ensuring rigidity and accuracy.
- Easy installation to the machine.
- Indexing movement during spindle rotation, allowing a quick change between the multiple working axes.
- Indexing and clamping mechanism constantly oil lubricated and supported by strong systems of roller bearings.
- Very high maximum speed, with centrifugal force compensation system, for higher productivity performance.
- Very simple hydraulic system based on just 4 hoses, 2 for the indexing mechanism and 2 for the clamping piston.
- Internal mechanisms fully protected against contamination by coolant, chips and dust.
- Constant and automatic control of the position of the part and other working parameters by the C.N.C. of the machine, or by a separate electronic interface.



### General operating diagram

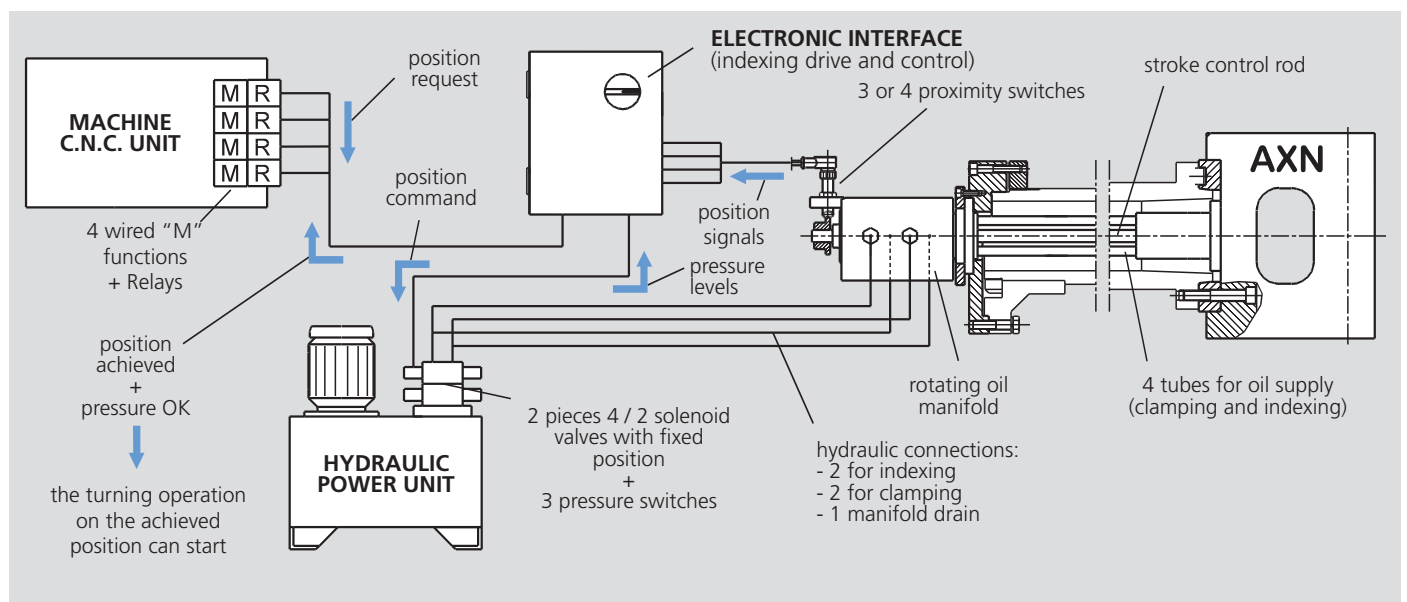

## Automatic indexing chuck Ø 210 - 1250 mm

**AXN®**

Automatic  
indexing chuck


### ■ Hydraulic clamping and indexing

#### ■ 2 jaws


#### ■ Divisions: 4 x 90° / 8 x 45° / 3 x 120° / 6 x 60° or specials

### Unique indexing system


- Extremely simple and rigid indexing system.
- On the indexing shaft there is a triangle, square or multiple face shape. The indexing shaft „A“ is rotated by the piston „C“ and is locked in position by the piston „B“.
- For clamping and indexing 4 hydraulic lines are needed.



**Picture 1**  
**Pressure in P1**  
Indexing shaft A locked in position 1 by the locator B: turning operation on the first side of the component.




**Picture 2**  
**Pressure in P2 (indexing)**  
The locator B retracts and releases the indexing shaft A; the finger C moves forward and rotates the shaft by 45°.



**Picture 3**  
**Pressure in P1**  
The finger C retracts, while the locator B moves forward rotating the shaft A to 90° and locking it in position 2 for machining of the workpiece.


### Centrifugal force compensation system

- Unique hydraulic system designed to reduce the loss of gripping force caused by the centrifugal force on the clamping piston P and clamping jaw A.
- The counterweight M is in a radial hole in the chuck body connected to the hydraulic circuit through the non-return valve V.
- During rotation, the pressure created by the counterweight M increases the pressure on the clamping piston P and compensates for the loss of gripping force due to the centrifugal force.

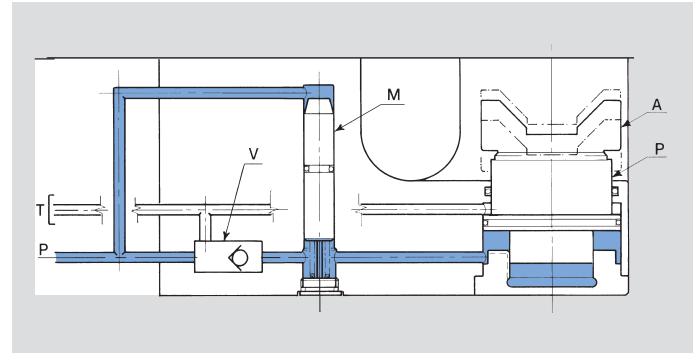


### Indexing position control system

- The indexing control is mounted on the oil manifold. It is actuated by a rod system and monitored by 4 proximity switches.
- The cam „E“ on the indexing jaw moves the rear switch ring „N“ via the rod „F“, lever „H“, rod „G“ and pullback spring „M“.
- The corresponding proximity switch „I“ for each indexing position is actuated by the switch ring „N“ and confirms, that the indexing position has been reached.

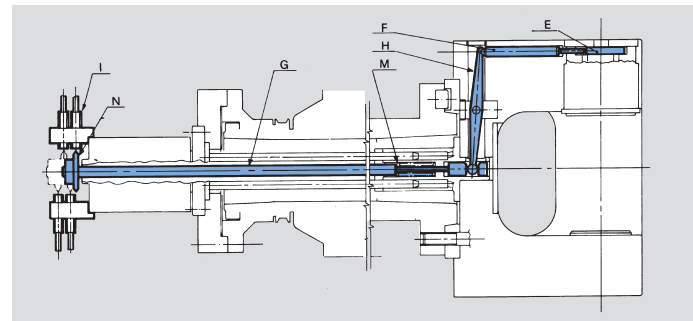

### Interchangeability between AXN indexing chuck and front end power chuck HYD-S

The AXN chuck can easily and quickly be changed with a front end power chuck with 3 or 4 jaws type HYD-S. The oil manifold and the tube bundle remain mounted on the machine to actuate the chuck.

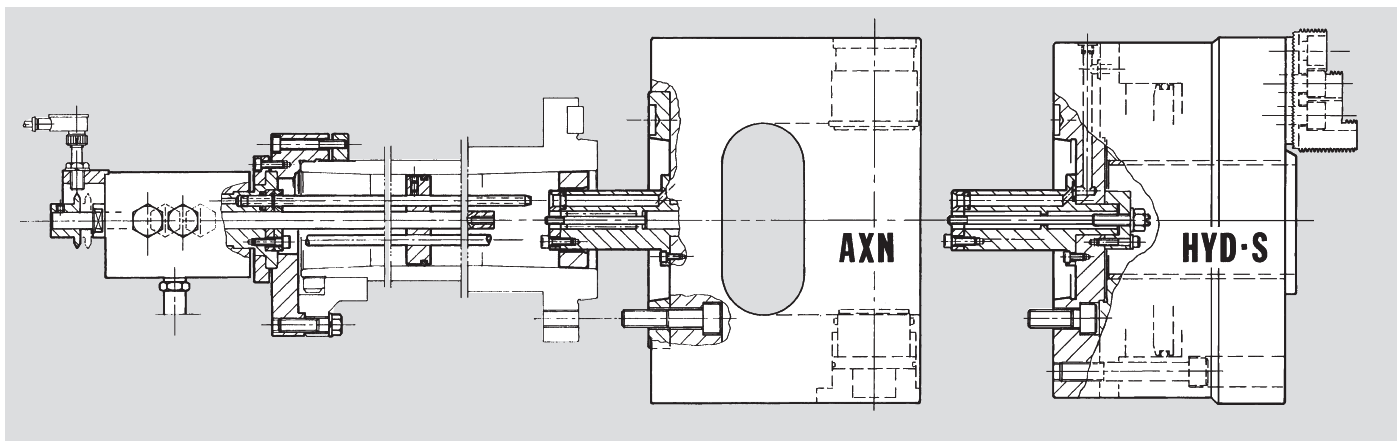



**AXN Automatic indexing chuck Ø 210 - 1250 mm**  
 ■ Divisions: 4 x 90° / 8 x 45° / 3 x 120° / 6 x 60° or specials

**AXN®**  
 Automatic indexing chuck  
 standard body

**AXN®-R**  
 Automatic indexing chuck  
 with reinforced body

## ISO-A flanges for AXN chucks

FF 1 Direct ISO-A mounting	FF 2 Reduction ISO-A mounting	FF 3 Increase ISO-A mounting	Chuck size	Spindle	Type	Id. No.	A	BF	BA	C	C1	T
			210-235	A5	2	24552030	-	170	82.563	104.8	133.4	24
			210-235	A6	1	24162500	-	170	106.375	133.4	-	24
			254-280-315-360	A6	2	24562530	-	220	106.375	133.4	171.4	24
			205-235	A8	3	24182030	210	170	139.719	171.4	133.4	40
			254-280-315-360	A8	1	24182500	-	220	139.719	171.4	-	19
			400-460	A8	2	24183100	-	300	139.719	171.4	235	30
			254-280-315-360	A11	3	24112530	280	220	196.869	235	171.2	50
			400-460	A11	1	24113100	-	300	196.869	235	-	21
			570-680	A11	2	24115000	-	380	196.869	235	330.2	40
			570-680	A15	1	24127100	-	380	285.775	330.2	-	33
			850-1250	A15	2	24126100	-	520	285.775	330.2	463.6	40
			850-1250	A20	1	24178000	-	520	412.775	463.6	-	25

## Main dimensions and technical data

SMW-AUTOBLOK Type AXN			210	235	254	280	315	360	400	460	570	680	850	1050	1250
A	mm		210	235	254	280	315	360	400	460	570	680	850	1050	1250
	mm		170	170	220	220	220	220	300	300	380	380	520	520	520
C	mm		133.4	133.4	171.4	171.4	171.4	171.4	235	235	330.2	330.2	463.6	463.6	463.6
	mm		13	13	17	17	17	17	21	21	27	27	27	27	27
E	mm		70	70	73	73	84	84	99	99	122	122	142	160	212
	mm		5.5	5.5	8.5	8.5	10.5	10.5	10.5	10.5	11	11	11	17	21
Max. workpiece rotation dia.	G	mm	184	206	228	250	275	315	350	410	490	600	750	900	1080
Max. axial loading window	G1	mm	175	197	216	240	261	301	333	394	466	576	730	880	1070
Max. workpiece rotation dia.	G2	mm	160	180	195	210	245	-	-	-	-	-	-	-	-
Max. axial loading window	G3	mm	150	170	183	198	230	-	-	-	-	-	-	-	-
H	mm		187	194	214	227	252	266	293	323	442	492	570	680	795
	mm		4	4	5	5	5	5	5	5	6	6	6	10	10
L	mm		42	42	45	45	60	60	70	70	100	100	100	154	168
	mm		9	9	11	11	12	12	12	12	15	15	15	18	18
N	mm		3	3	6	6	7	7	10	10	10	10	10	10	10
	mm		22	22	36	36	48	48	62	62	62	62	62	70	70
P	mm		36	36	42	42	53	53	60	60	92	92	95	130	145
	mm		95	102	112	125	136	150	170	200	270	320	385	460	560
Max.	R	mm	41.9	54.5	57	70	77	99.5	110	140	180	235	305	360	405
S	mm		12	12	14	14	18	18	18	18	19	19	19	22	22
	mm		30	42.5	45	58	63	85.5	91	121	150	205	270	310	340
Clamping jaw stroke	U	mm	15	15	17	17	23	23	30	30	40	40	55	65	86
V	mm		M6	M6	M8	M8	M10	M10	M10	M10	M10	M10	M10	M12	M12
	mm		12	12	18	18	22	22	22	22	50	50	50	55	65
Y	mm		16	16	16	16	18	18	18	18	25	25	25	25	25
	mm		28	28	32	32	29	29	24	24	50	50	60	70	60
a	mm		40	40	60	60	100	100	100	100	100	100	100	110	110
	mm		17.5	17.5	26	26	45	45	42	42	42	42	42	47	47
c	mm		0.5	0.5	0.5	0.5	0.5	0.5	1	1	1	1	1	3	3
	mm		28	28	35	35	40	40	40	40	90	90	90	130	148
m	mm		M5	M5	M6	M6	M8	M8	M8	M8	M10	M10	M10	10 x M12	10 x M12
	mm		12	12	18	18	22	22	22	22	22	22	22	22	22
Clamping piston area	cm²		30	30	43	43	63.6	63.6	86.6	86.6	113	113	132	227	530
Max pressure	bar		45	45	45	45	45	45	45	45	45	45	45	45	45
Max. speed <sup>(1)</sup>	r.p.m.		4400	3800	3600	3400	2800	2400	2200	1800	1200	1000	700	500	400
Moment of inertia	kg·m²		0.17	0.27	0.45	0.69	1.27	2.15	3.4	6.4	20	39	106	290	530
Clamping top jaw weight <sup>(1)</sup>	kg		0.6	0.6	1.3	1.3	2	2	4	5	6	7	9	15	50
Weight	kg		28	32	47	57	82	104	137	182	370	520	890	1600	2200

Id. No. AXN with divisions 4x90°	77897021	77897024	77897025	77897028	77897031	77897036	77897040	77897046	-	-	-	-	-	-	-
Id. No. AXN with divisions 8x45°	77897321	77897324	77897325	77897328	77897331	77897336	77897340	77897346	77897357	77897368	77897385	77897390	77897392		
Id. No. AXN with divisions 3x120°	77897121	77897124	77897125	77897128	77897131	77897136	-	-	-	-	-	-	-	-	-
Id. No. AXN-R with divisions 4x90°	77895021	77895024	77895025	77895028	77895031	-	-	-	-	-	-	-	-	-	-
Id. No. AXN-R with divisions 8x45°	77895421	77895424	77895425	77895428	77895431	-	-	-	-	-	-	-	-	-	-
Id. No. AXN-R with divisions 3x120°	77895121	77895124	77895125	77895128	77895131	-	-	-	-	-	-	-	-	-	-

### (1) IMPORTANT:

- Max rotation speed can be reached only at max. operating pressure and using a clamping jaw with a mass not exceeding the value shown in the above schedule.
- The component to be machined and the two clamping jaws must always be perfectly balanced around the axis of rotation. If this is not possible or the clamping jaw is heavier, the rotation speed must be correspondingly reduced.
- The component may be indexed during rotation; when working at high r.p.m., it is advisable to reduce speed by at least 50% during the indexing operation to avoid vibrations due to the unbalance of masses while the part is in an intermediate position.