


- Double piston rotating hydraulic cylinder
- Up to 70 bar
- Central bore for air / coolant / oil
- Stroke control via proximity switch or LPS 4.0

Equal piston area and stroke
2 independent pistons

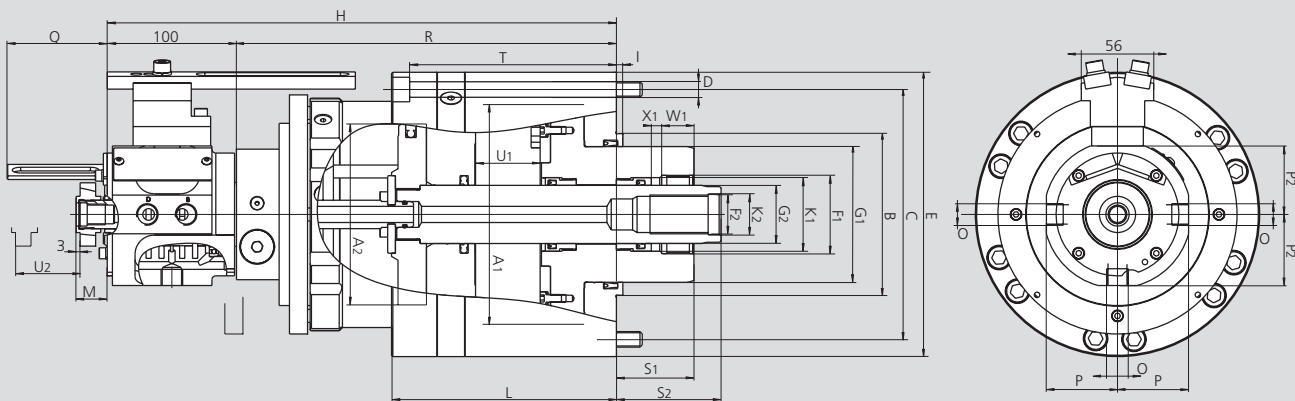

Subject to technical changes.
For more detailed information please ask our customer service.

SMW-AUTOBLOK Type			DCE 64-64 / 30-40	DCE 140-140 / 50-50	DCE 240-240 / 60-60
Piston diameter 1	A1	mm	125	170	215
Piston diameter 2	A2	mm	95	140	183
Centering rim	B h6	mm	105	125	160
Fixing bolt circle	C	mm	145	195	250
Fixing bolts	D	mm	6 x M10	6 x M12	6 x M16
	E	mm	174	220	280
Piston rod thread 1	F1	mm	M45 x 1.5	M60 x 1.5	M75 x 2
Piston rod thread 2	F2	mm	M20 x 1.5	M30	M36
	G1	mm	85	105	125
	G2	mm	30	45	55
	H	mm	362	394	451
	I	mm	5	5	5
	K1	mm	42	57	70
	K2	mm	20,5	31	37
	L	mm	164	174	213
Max.	M	mm	31	24	28
	O	inch	G 3/8"	G 3/8"	G 1/2"
	P	mm	55	55	62
	P1	mm	55	55	63
	P2	mm	53	53	63
	Q	mm	77	77	97
	R	mm	262	294	326
Min.	S1	mm	40	60	70
Min.	S2	mm	76	81	110
	T	mm	151	160	197
Piston stroke cyl. 1	U1	mm	30	50	60
Piston stroke cyl. 2	U2	mm	40	50	60
	W1	mm	25	25	35
	W2	mm	30	45	50
	X1	mm	10	8	9
	X2	mm	10	10	10

DCE cylinder with optional LPS 4.0 linear stroke control

